



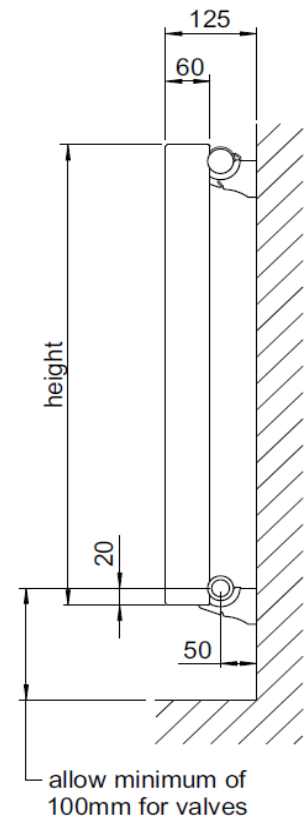

Model	Output $\Delta T=60K$ Watts	n	Water Content litres	Weight kg	Height $\pm 2mm$	Length $\pm 2mm$	Tapping Centres $\pm 2mm$	Fixing Centres $\pm 2mm$
FN 60-79	1188	1.27	7.5	22	600	780	n/a	630
FN 60-97	1462	1.27	9.3	27	600	960	n/a	810
FN 60-115	1737	1.27	11.0	32	600	1140	n/a	990
FN 60-133	2011	1.27	12.8	37	600	1320	n/a	1170

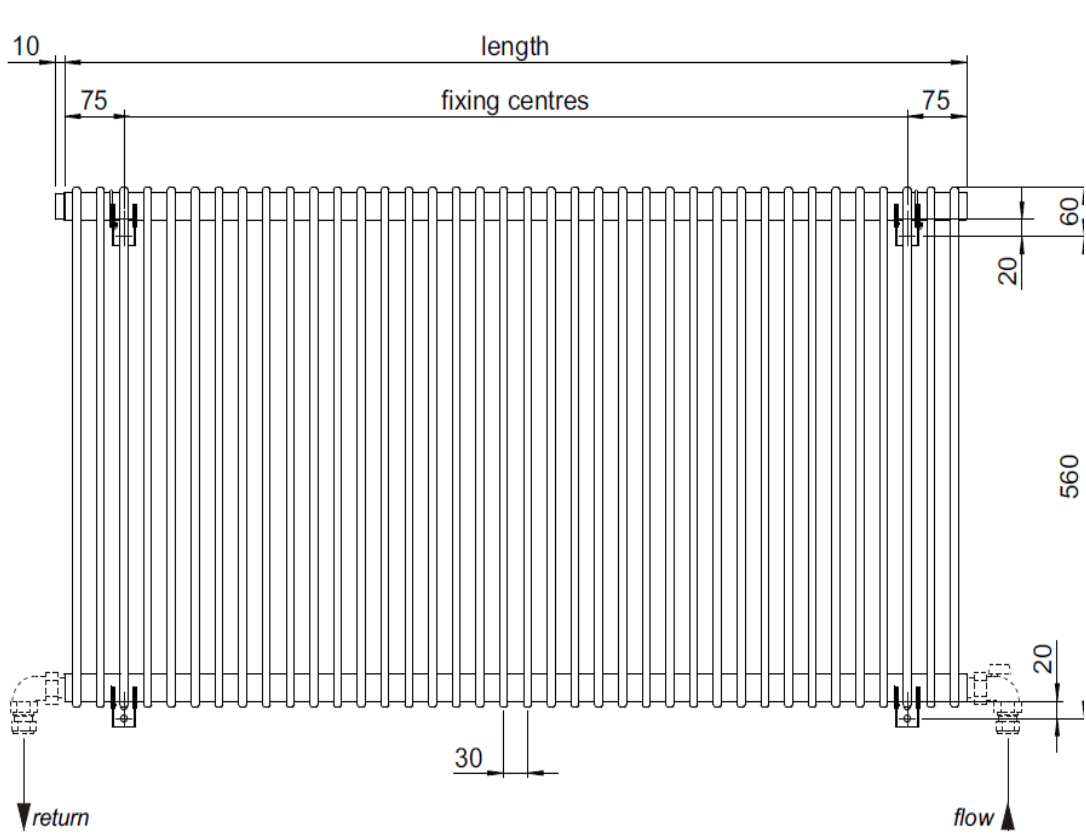


Finn Technical Detail : RC/PW/01.11

Pipe Centres = Length + valve centres,
ie: Length + 80mm with Standard RadCen Valves



[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
 www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687



Model	Output ΔT=60K Watts	n	Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Centres ± 2mm
FN 150-25	832	1.29	5.3	16	1500	240	n/a	150
FN 150-31	1040	1.29	6.6	20	1500	300	n/a	210
FN 150-37	1248	1.29	7.9	24	1500	360	n/a	270
FN 150-43	1456	1.29	9.2	28	1500	420	n/a	330
FN 180-25	985	1.29	6.4	19	1800	240	n/a	150
FN 180-31	1230	1.29	8.0	24	1800	300	n/a	210
FN 180-37	1476	1.29	9.6	29	1800	360	n/a	270
FN 180-43	1722	1.29	11.2	34	1800	420	n/a	330

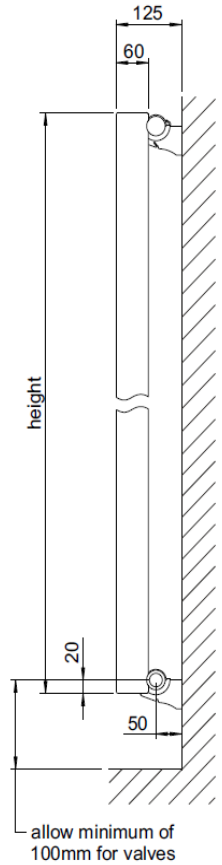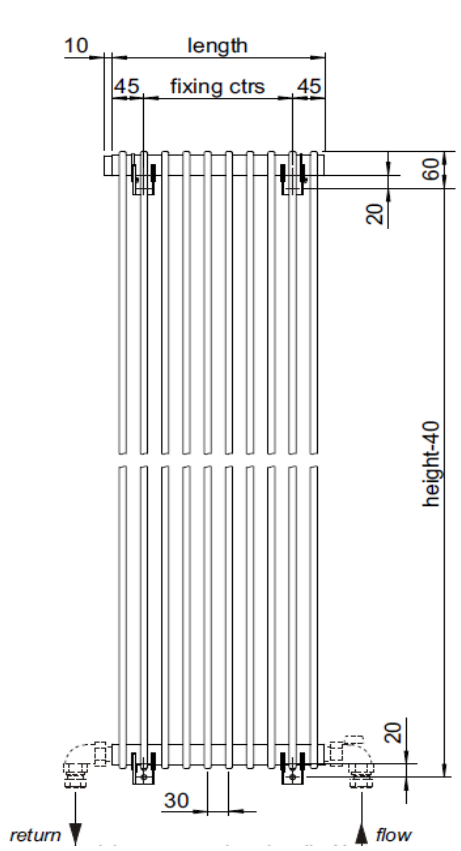

All dimensions shown are in millimetres

- Test pressure: 6.5 BAR
- Max working pressure: 5 BAR
- Max working temperature: 120° C
- All steel construction: 60mm x 10mm x 1.3mm fins
dia 35mm x 1.5mm headers
- Connections: ½ inch BSP bottom opposite end tappings
- Not suitable for use on domestic hot water system**
- Heat output determined in accordance with EN 442

Finn Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]