


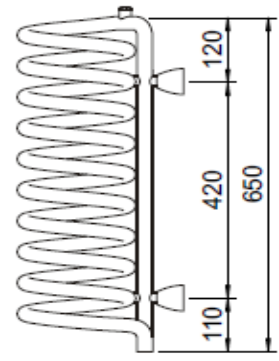





Allow minimum of 100mm for valves

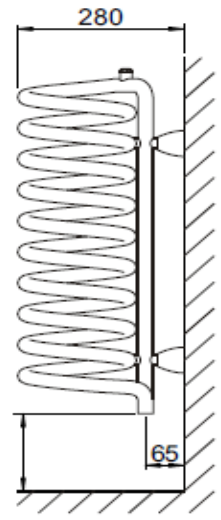


**HOT 60**

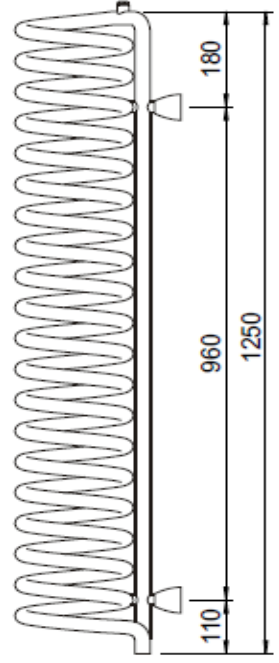

**HOT 120**

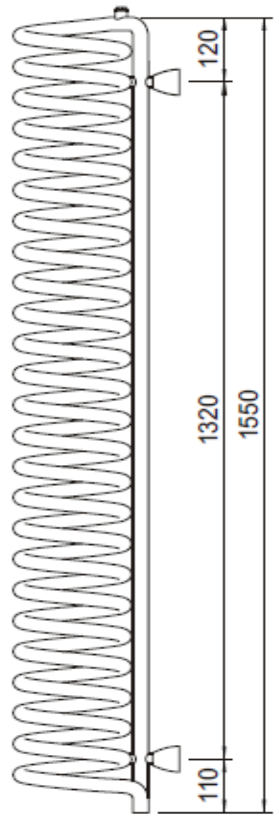

**HOT 150**

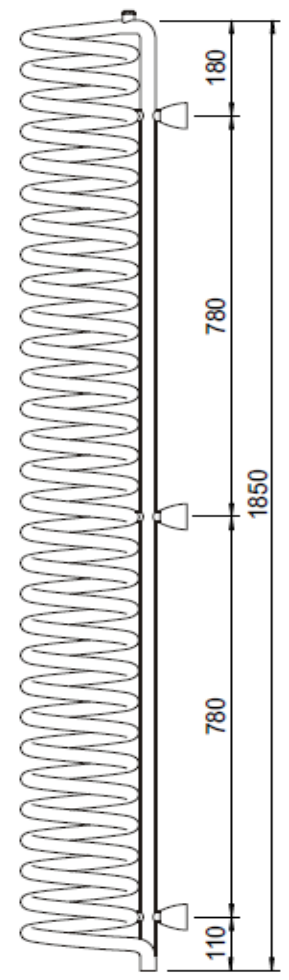

**HOT 180**

Hot Spring Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG  
 www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687

Model	Output* ΔT=60K Watts	n	Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Centres ± 2mm
HOT 60	390	1.27	4.5	10	650	200	60	420
HOT 120	781	1.27	6.4	14	1250	200	60	960
HOT 150	1050	1.27	8.0	18	1550	200	60	1320
HOT 180	1319	1.27	9.6	21	1850	200	60	780

\* for chrome finish reduce shown output by 20%

*All dimensions shown are in millimetres*

- Test pressure: **12 BAR**
- Max working pressure: **8 BAR**
- Max working temperature: **95° C**
- All steel construction: **dia 26mm x 2mm tubes**
- Connections: **½ inch BSP underside tappings**

***Not for use on domestic hot water system***

***This radiator may only be installed vertically as shown***

Hot spring Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

**Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG**  
 www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687