




Connections Detail

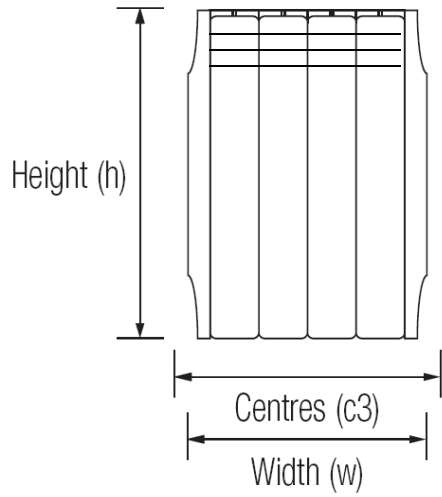

Pipe Centres = c3 + valve centres
 ie: c3 + 80mm with Standard RadCen Valves

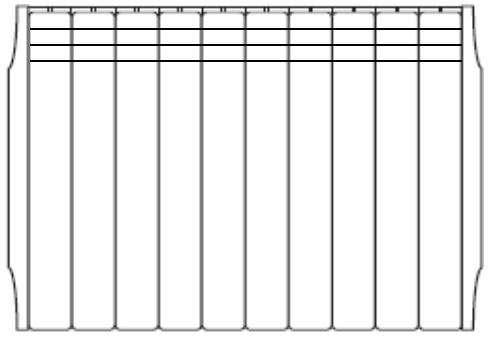

Customising Heat.

Radiator Centre Ltd offers innovation in terms of attitude and quality and in terms of image and customisation: radiators today represent a real feature of a given environment and can be chosen especially to fit in with specific colour schemes and decorative themes. With Tondo form and function find new balance and new strength.



Decorate heat exactly as you wish

Protective aluminium oxide coating (Total Protection System)

Aluminium structure

Powder coated finish



[Outputs: 90/70/20 Δt 60°C EN442]

Tondo ON Technical Detail : RC/PW/01.11

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
 WWW.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687

[Tondo ON] lightweight Italian Aluminium

[Jan 2011]

CODE	Height (mm)	Width (mm)	Depth (mm)	Projecti on (mm)	Centres (C3) (mm)	Centres (C2) (mm)	Weight (kg)	Water content (ltrs)	Power (watts)
TO35-03	425	260	100	125	260	65	3.90	1.11	319
TO35-04	425	340	100	125	340	65	5.10	1.45	426
TO35-05	425	420	100	125	420	65	6.30	1.79	532
TO35-06	425	500	100	125	500	65	7.50	2.13	639
TO35-07	425	580	100	125	580	65	8.70	2.47	745
TO35-08	425	660	100	125	660	65	9.90	2.81	851
TO35-09	425	740	100	125	740	65	11.10	3.15	958
TO35-10	425	820	100	125	820	65	12.30	3.49	1064
TO35-11	425	900	100	125	900	65	13.50	3.83	1171
TO35-12	425	980	100	125	980	65	14.70	4.17	1277
TO35-13	425	1060	100	125	1060	65	15.90	4.51	1384
TO35-14	425	1140	100	125	1140	65	17.10	4.85	1490
TO35-15	425	1220	100	125	1220	65	18.30	5.19	1596
TO35-16	425	1300	100	125	1300	65	19.50	5.53	1703
TO35-17	425	1380	100	125	1380	65	20.70	5.87	1809
TO35-18	425	1460	100	125	1460	65	21.90	6.21	1916
TO35-19	425	1540	100	125	1540	65	23.10	6.55	2022
TO35-20	425	1620	100	125	1620	65	24.30	6.89	2129

CODE	Height (mm)	Width (mm)	Depth (mm)	Projecti on (mm)	Centres (C3) (mm)	Centres (C2) (mm)	Weight (kg)	Water content (ltrs)	Power (watts)
TO50-03	575	260	100	125	260	65	5.04	1.33	430
TO50-04	575	340	100	125	340	65	6.59	1.74	573
TO50-05	575	420	100	125	420	65	8.14	2.15	716
TO50-06	575	500	100	125	500	65	9.69	2.56	859
TO50-07	575	580	100	125	580	65	11.24	2.97	1002
TO50-08	575	660	100	125	660	65	12.79	3.38	1145
TO50-09	575	740	100	125	740	65	14.34	3.79	1289
TO50-10	575	820	100	125	820	65	15.89	4.20	1432
TO50-11	575	900	100	125	900	65	17.44	4.61	1575
TO50-12	575	980	100	125	980	65	18.99	5.02	1718
TO50-13	575	1060	100	125	1060	65	20.54	5.43	1861
TO50-14	575	1140	100	125	1140	65	22.09	5.84	2004
TO50-15	575	1220	100	125	1220	65	23.64	6.25	2148
TO50-16	575	1300	100	125	1300	65	25.19	6.66	2291
TO50-17	575	1380	100	125	1380	65	26.74	7.07	2434
TO50-18	575	1460	100	125	1460	65	28.29	7.48	2577
TO50-19	575	1540	100	125	1540	65	29.84	7.89	2720
TO50-20	575	1620	100	125	1620	65	31.39	8.30	2863

CODE	Height (mm)	Width (mm)	Depth (mm)	Projecti on (mm)	Centres (C3) (mm)	Centres (C2) (mm)	Weight (kg)	Water content (ltrs)	Power (watts)
TO60-03	675	260	100	125	260	65	5.88	1.56	490
TO60-04	675	340	100	125	340	65	7.69	2.04	654
TO60-05	675	420	100	125	420	65	9.50	2.52	817
TO60-06	675	500	100	125	500	65	11.31	3.00	981
TO60-07	675	580	100	125	580	65	13.12	3.48	1144
TO60-08	675	660	100	125	660	65	14.93	3.96	1308
TO60-09	675	740	100	125	740	65	16.74	4.44	1471
TO60-10	675	820	100	125	820	65	18.55	4.92	1634
TO60-11	675	900	100	125	900	65	20.36	5.40	1798
TO60-12	675	980	100	125	980	65	22.17	5.88	1961
TO60-13	675	1060	100	125	1060	65	23.98	6.36	2125
TO60-14	675	1140	100	125	1140	65	25.79	6.84	2288
TO60-15	675	1220	100	125	1220	65	27.60	7.32	2452
TO60-16	675	1300	100	125	1300	65	29.41	7.80	2615
TO60-17	675	1380	100	125	1380	65	31.22	8.28	2779
TO60-18	675	1460	100	125	1460	65	33.03	8.76	2942
TO60-19	675	1540	100	125	1540	65	34.84	9.24	3105
TO60-20	675	1620	100	125	1620	65	36.65	9.72	3269

CODE	Height (mm)	Width (mm)	Depth (mm)	Projecti on (mm)	Centres (C3) (mm)	Centres (C2) (mm)	Weight (kg)	Water content (ltrs)	Power (watts)
TO80-03	875	260	100	125	260	65	6.70	1.76	616
TO80-04	875	340	100	125	340	65	8.76	2.30	821
TO80-05	875	420	100	125	420	65	10.82	2.84	1026
TO80-06	875	500	100	125	500	65	12.88	3.38	1232
TO80-07	875	580	100	125	580	65	14.94	3.92	1437
TO80-08	875	660	100	125	660	65	17.00	4.46	1642
TO80-09	875	740	100	125	740	65	19.06	5.00	1847
TO80-10	875	820	100	125	820	65	21.12	5.54	2053
TO80-11	875	900	100	125	900	65	23.18	6.08	2258
TO80-12	875	980	100	125	980	65	25.24	6.62	2463
TO80-13	875	1060	100	125	1060	65	27.30	7.16	2668
TO80-14	875	1140	100	125	1140	65	29.36	7.70	2874
TO80-15	875	1220	100	125	1220	65	31.42	8.24	3079
TO80-16	875	1300	100	125	1300	65	33.48	8.78	3284
TO80-17	875	1380	100	125	1380	65	35.54	9.32	3489
TO80-18	875	1460	100	125	1460	65	37.60	9.86	3695
TO80-19	875	1540	100	125	1540	65	39.66	10.40	3900
TO80-20	875	1620	100	125	1620	65	41.72	10.94	4105

Tondo ON Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
WWW.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687