




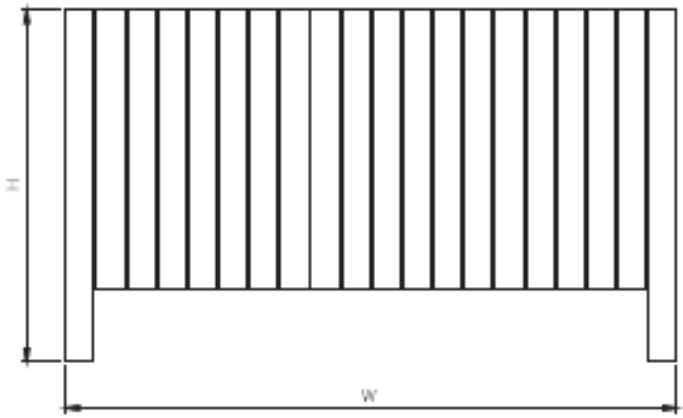

Connections Detail

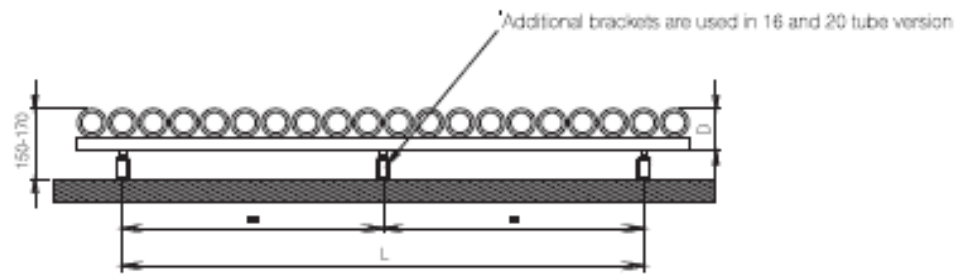


Pipe Centres = Width + valve centres
 ie: Width + 80mm with Standard RadCen Valves

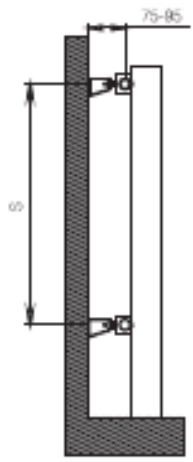

| | |
|--------------------------|------------------------------|
| material | <i>stainless steel</i> |
| finish | <i>satin polished</i> |
| electric version | <i>not available</i> |
| wall installation | <i>vertical / horizontal</i> |
| warranty | <i>10 years</i> |

*max. working pressure: 10 bar
 max. working temperature: 95°C
 all dimensions are in mm.
 connections 1/2"*

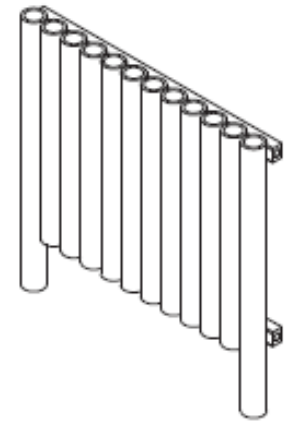


Fortuna Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
 WWW.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687



Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
WWW.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687

| Product Code | Width | Height | Depth | Connection Centers | Tube Quantity | Assembly Axis | | Weight | Water Capacity | THERMAL POWER | | |
|-----------------|-------|--------|-------|--------------------|---------------|---------------|------|--------|----------------|---------------|-------|------|
| | W | H | D | C | | S | L | kg. | lt. | btu | k/cal | watt |
| FOR051506000809 | 515 | 600 | 102 | 515 | 8 | 360 | 390 | 18 | 4,5 | 3799 | 957 | 1113 |
| FOR064506001009 | 645 | 600 | 102 | 645 | 10 | 360 | 520 | 22,2 | 5,7 | 4679 | 1178 | 1370 |
| FOR077506001209 | 775 | 600 | 102 | 775 | 12 | 360 | 650 | 26,4 | 6,8 | 5558 | 1400 | 1628 |
| FOR090506001409 | 905 | 600 | 102 | 905 | 14 | 360 | 780 | 30,6 | 8 | 6437 | 1621 | 1885 |
| FOR103506001609 | 1035 | 600 | 102 | 1035 | 16 | 360 | 845 | 34,8 | 9,1 | 7317 | 1843 | 2143 |
| FOR129506002009 | 1295 | 600 | 102 | 1295 | 20 | 360 | 1105 | 43,3 | 11,4 | 9075 | 2285 | 2658 |
| FOR051507600809 | 515 | 760 | 102 | 515 | 8 | 520 | 390 | 23,3 | 5,5 | 4942 | 1245 | 1447 |
| FOR064507601009 | 645 | 760 | 102 | 645 | 10 | 520 | 520 | 28,7 | 6,9 | 6107 | 1538 | 1788 |
| FOR077507601209 | 775 | 760 | 102 | 775 | 12 | 520 | 650 | 34,1 | 8,2 | 7272 | 1831 | 2129 |
| FOR090507601409 | 905 | 760 | 102 | 905 | 14 | 520 | 780 | 39,5 | 9,6 | 8437 | 2125 | 2471 |
| FOR103507601609 | 1035 | 760 | 102 | 1035 | 16 | 520 | 845 | 45,4 | 11 | 9602 | 2418 | 2812 |
| FOR129507602009 | 1295 | 760 | 102 | 1295 | 20 | 520 | 1105 | 51,6 | 13,8 | 11932 | 3005 | 3494 |

Fortuna Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]