


DETAIL A




1/2" Conn. center-wall distance

Side View

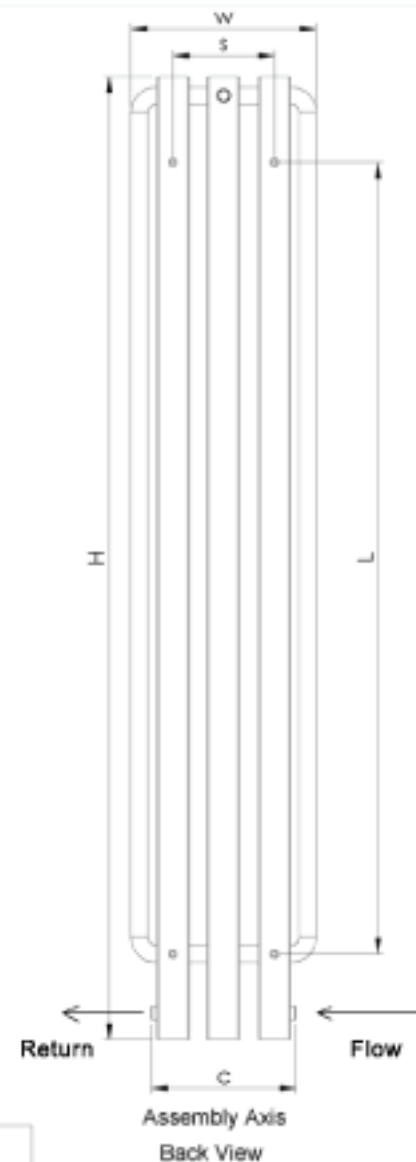

Assembly Axis Back View



Top View

Note : Flow / Return can be reserved if required.



- 1- Allen Key
- 2- Bracket
- 3- Short Pillar Nut
- 4- Grub Screw
- 5- Wall Plug
- 6- Screw, dia 6mm.
- 7- Air Vent
- 8- Blanking Plug

- Wall Mounting Instructions:**
- 1- According to the relative wall connection axis (L) & (S) drill 4 Nr holes 10 mm.Ø x 50 mm. depth.
 - 2- Insert wall plugs (5) into the drilled holes.
 - 3- Screw the brackets (2) with the screws (6) into the wall plugs (5).
 - 4- The Short Pillar Nuts (3) are screwed into the collectors at the back of the radiator as shown in detail C.
 - 5- Offer up the radiator and insert the short pillar nuts (3) into the brackets (2).
 - 6- Using the allen key (1) provided, retain the short pillar nuts (3) into the brackets (2) with the grub screws (4).

Water Connections : 1/2" BSP
 Not suitable for use with direct hot water systems. Not suitable for gravity circulation.

Product Code	Width	Height	Conn. Centers	Assembly Axis		No. Of Tubes
	W	H	C	S	L	
HERMS1800-03	350	1800	270	190	1480	3
HERMS1500-04	445	1500	365	285	1180	4
HERMS1800-04	445	1800	365	285	1480	4

*All measurements are in millimetres
 This publication is issued subject to alteration or withdrawal without notice

