

## TOWEL RADIATORS

# [Bowfront Towel Radiator]

The Bowfront for your biggest, softest towels with this bold design. Particularly stunning in chrome, the discrete curve reflects a kaleidoscope of light and colour, providing greater clearance for bulky towels and an attractive alternative to the straight fronted radiator.

### Specifications

Models Available	9
Materials	Steel
Standard Finish	White and Chrome
Delivery Information	Standard finish : up to 10 working days Colour options : up to 30 working days
Guarantee	5 years
Output Range	250 - 1423W
Connections	1/2 BSP



[Outputs: 90/70/20  $\Delta t$  60°C EN442]


[Dimensions in millimetres]




2 Grand Parade Polegate East Sussex BN26 5HG  
Telephone: +44 (0)1323 486848  
info@radiatorcentre.com www.radiatorcentre.com

TOWEL RADIATORS

[Bowfront Towel Radiator]

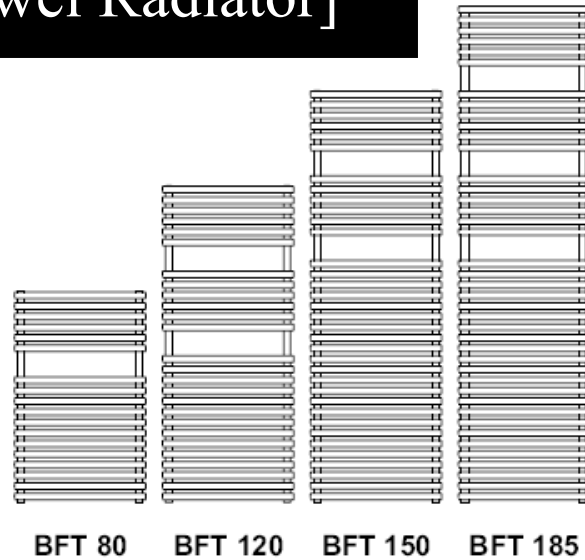

Model	Output - White			Output - Chrome			Water Content litres	Weight kg	Height ± 2mm	Length ± 2mm	Tapping Centres ± 2mm	Fixing Ctrs V ± 2mm
	ΔT=50K Watts	ΔT=60K Watts	n	ΔT=50K Watts	ΔT=60K Watts	n						
BFT 80-50	418	522	1.22	275	348	1.29	4.3	8	796	497	448	680
BFT 80-60	492	613	1.21	323	409	1.29	5.0	10	796	597	550	680
BFT 80-75	603	752	1.21	395	500	1.29	6.0	12	796	747	701	680
BFT 120-50	601	752	1.23	397	501	1.28	6.1	12	1196	497	448	1080
BFT 120-60	709	886	1.22	467	589	1.27	7.2	14	1196	597	550	1080
BFT 120-75	870	1085	1.21	571	720	1.27	8.8	17	1196	747	701	1080
BFT 150-50	792	993	1.24	527	668	1.30	8.2	16	1556	497	448	1440
BFT 150-60	935	1170	1.23	624	791	1.30	9.6	19	1556	597	550	1440
BFT 150-75	1148	1434	1.22	770	974	1.29	11.6	23	1556	747	701	1440
BFT 185-50	940	1178	1.24	631	797	1.28	9.7	19	1876	497	448	1760
BFT 185-60	1099	1375	1.23	742	937	1.28	11.3	22	1876	597	550	1760
BFT 185-75	1339	1673	1.22	909	1148	1.28	13.7	27	1876	747	701	1760

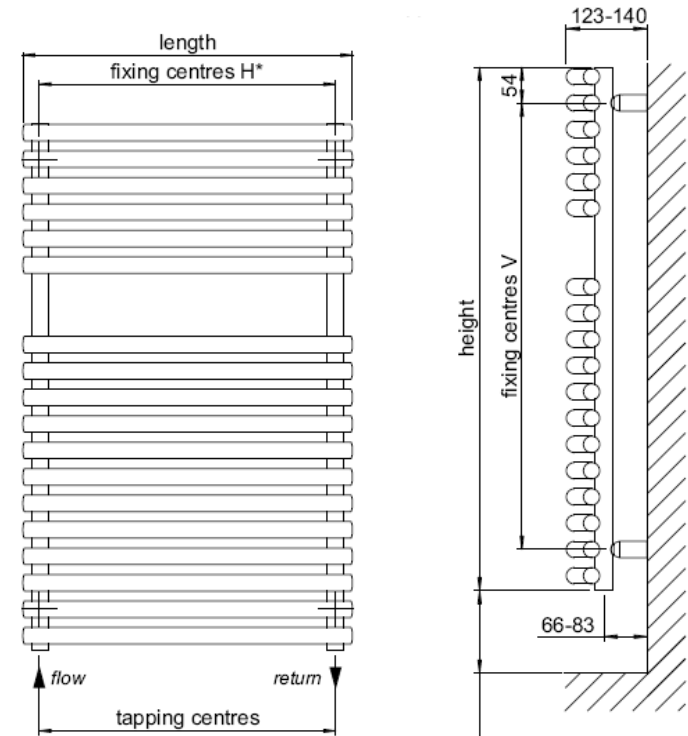

note: flow & return can be reversed if required

Allow minimum of 100mm for valves

All dimensions shown are in millimetres

- Test pressure: 13 BAR
- Max working pressure: 10 BAR
- Max working temperature: 100° C
- All steel construction: dia 25mm x 1.2mm tubes  
dia 26mm x 1.5mm headers
- Connections: ½ inch BSP underside tapings

Not suitable for use on domestic hot water system  
Heat output determined in accordance with EN 442



2 Grand Parade Polegate East Sussex BN26 5HG  
Telephone: +44 (0)1323 486848  
info@radiatorcentre.com www.radiatorcentre.com

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]