


Pipe Centres = Width + valve centres
 ie: Width + 80mm with Standard RadCen Valves

Bracket centres V:
 H - 30mm (White)
 H - 40mm (Stainless)

Centres :
 Single = 48mm
 Double = 69mm

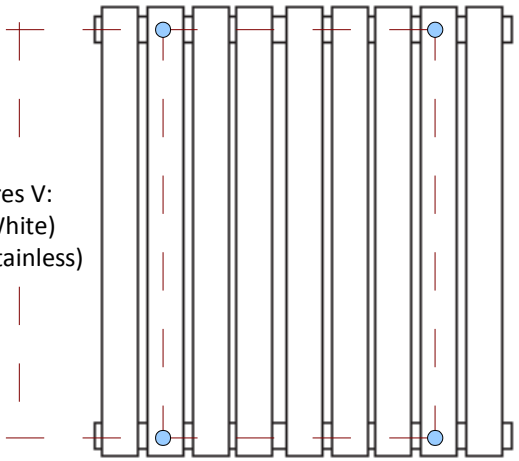


Bracket centres H:
 W - 180mm (White)
 W - 200mm (Stainless)

Arc Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]



Stainless Steel

CODE	Height (mm)	Width (mm)	Depth (mm)	Projection (mm)	Power (watts)
------	-------------	------------	------------	-----------------	---------------

Single Profile

ARC 40/60	600	400	63	92	372
ARC 57/60	600	570	63	92	558
ARC 80/60	600	800	63	92	806
ARC 100/60	600	1000	63	92	1054
ARC 120/60	600	1200	63	92	1178
ARC 150/60	600	1500	63	92	1488
ARC 45/150	1500	450	63	92	987
ARC 25/180	1800	250	63	92	684
ARC 31/180	1800	310	63	92	855
ARC 45/180	1800	450	63	92	1190
ARC 56/180	1800	560	63	92	1539

Stainless Steel

CODE	Height (mm)	Width (mm)	Depth (mm)	Projection (mm)	Power (watts)
------	-------------	------------	------------	-----------------	---------------

Double Profile

ARC 40/60D	600	400	88	113	642
ARC 57/60D	600	570	88	113	963
ARC 75/60D	600	750	88	113	1284
ARC 100/60D	600	1000	88	113	1819
ARC 120/60D	600	1200	88	113	2033
ARC 150/60D	600	1500	88	113	2568
ARC 45/150D	1500	450	88	113	1925
ARC 25/180D	1800	250	88	113	1334
ARC 31/180D	1800	310	88	113	1668
ARC 45/180D	1800	450	88	113	2320
ARC 56/180D	1800	560	88	113	2999

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
 www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687