



Pipe Centres = Width + valve centres

ie: Width + 80mm with Standard RadCen Valves

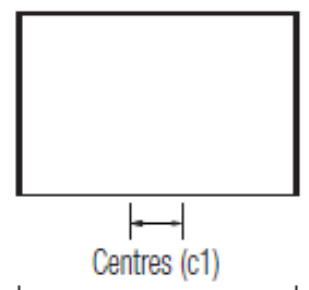


Alternative connections C1 = 50mm centres, central downward facing connections. Suitable for standard valves or Varicon Valve Set

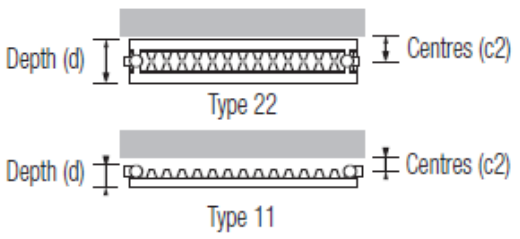


Centres C2 =  
 Type 22 : 95.5mm  
 Type 11 : 36mm


TBOE, BBOE or TBSE Connection Details

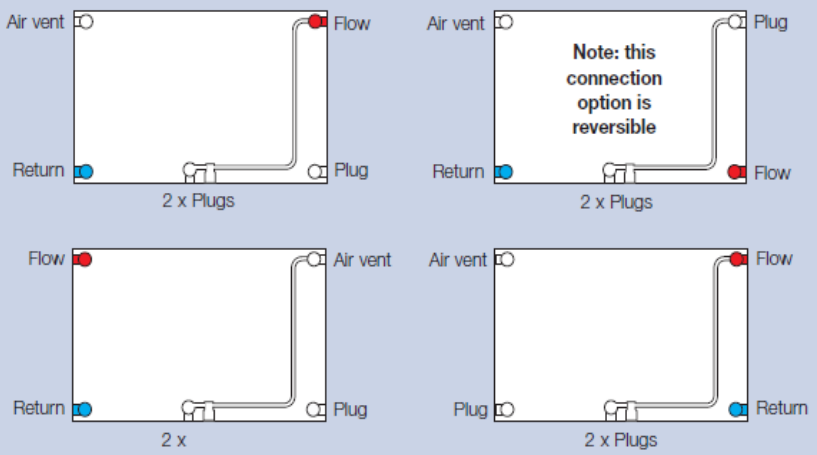

Variocon Detail

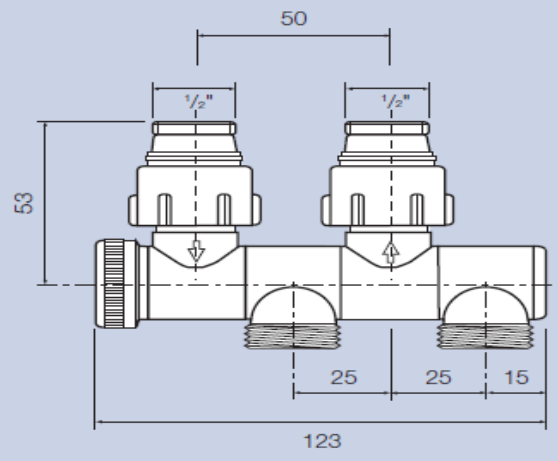

Connection Detail Utilising Variocon Valve & Thermostatic Head.

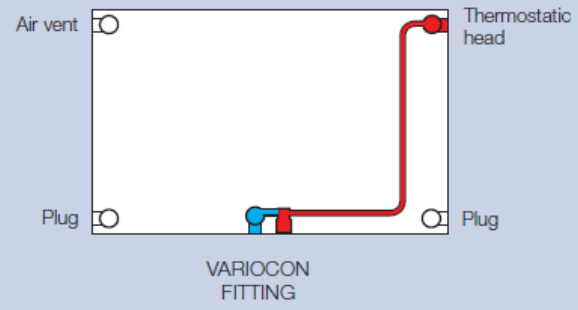


Carat H Technical Detail : RC/PW/01.11


[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]


# Lug Positions / Bracket Requirements

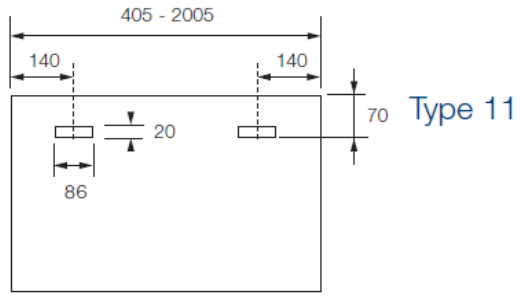


Type 11

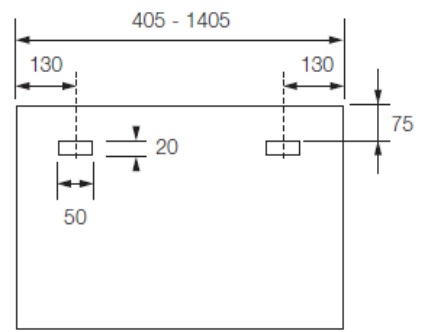

Type 20, 21, 22, 33

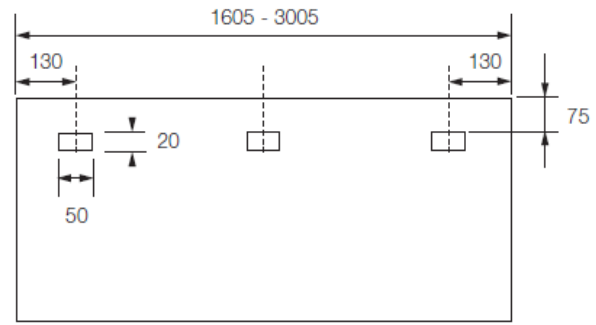


## Wall Brackets

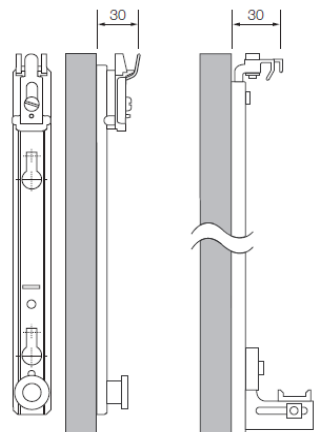

Type 11

Type 20,21,22,33

## Dimensions

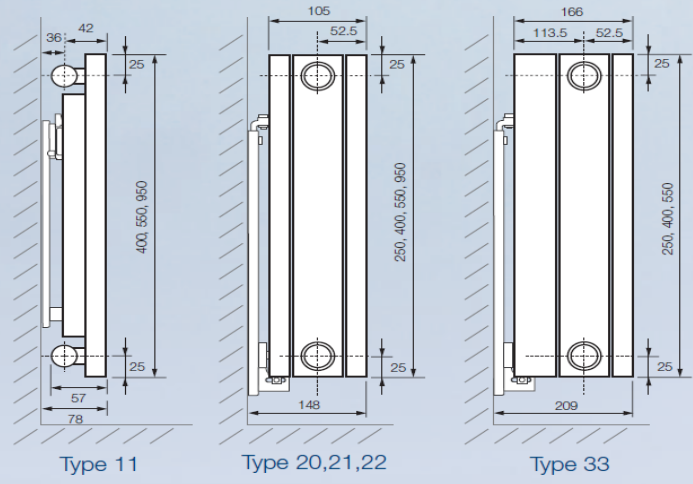

Type 11


Type 20,21,22

Type 33

Carat H Technical Detail : RC/PW/01.11

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]



CODE	Height (mm)	Width (mm)	Depth (mm)	Projection (mm)	Power (watts)
<b>Type 11 Horizontal</b>		No grille available for type 11 style			
4008-11	400	805	57	78	626
4010-11	400	1005	57	78	783
4012-11	400	1205	57	78	940
4014-11	400	1405	57	78	1096
4016-11	400	1605	57	78	1253
4018-11	400	1805	57	78	1409
4020-11	400	2005	57	78	1566
5506 -11	550	605	57	78	631
5508-11	550	805	57	78	841
5510-11	550	1005	57	78	1052
5512-11	550	1205	57	78	1262
5514-11	550	1405	57	78	1472
5516-11	550	1605	57	78	1683
5518-11	550	1805	57	78	1893
5520-11	550	2005	57	78	2103

CODE	Height (mm)	Width (mm)	Depth (mm)	Projection (mm)	Power (watts)
<b>Type 22 Horizontal</b>					
4006-22	400	605	105	148	832
4008-22	400	805	105	148	1110
4010-22	400	1005	105	148	1387
4012-22	400	1205	105	148	1665
4014-22	400	1405	105	148	1942
4016-22	400	1605	105	148	2220
4018-22	400	1805	105	148	2497
4020-22	400	2005	105	148	2775
5506 -22	550	605	105	148	1110
5508-22	550	805	105	148	1466
5510-22	550	1005	105	148	1832
5512-22	550	1205	105	148	2198
5514-22	550	1405	105	148	2564
5516-22	550	1605	105	148	2932
5518-22	550	1805	105	148	3298
5520-22	550	2005	105	148	3664

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG  
 www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687