



Standard Connections

Optional Connections


Pipe Centres = Width + valve centres

ie: Width + 80mm with Standard RadCen Valves

Please note the flow is on the left

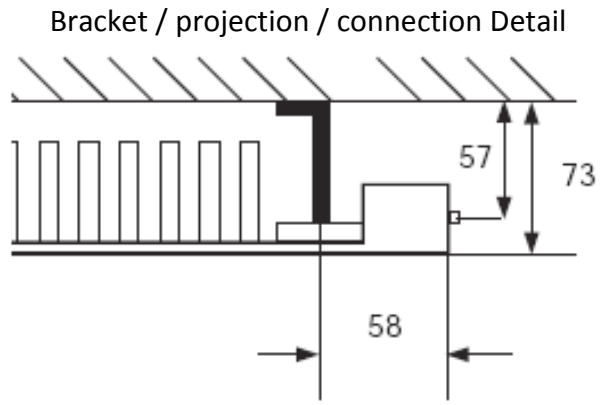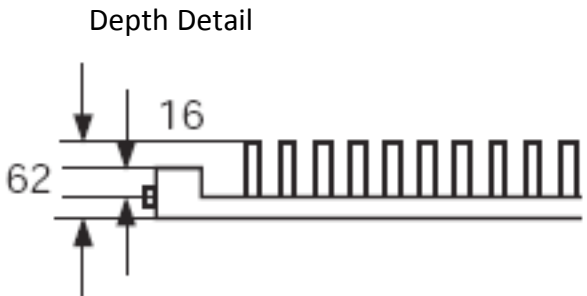

Wall Bracket – Horizontal & Vertical Models



Fixed position at 30mm and 50mm



117/L = Left hand bracket

117/R = Right hand bracket


Model	Height	Depth	Watts (per metre)	Weight KG (per metre)	Water content litre (per metre)
SCH / 7	70	62	262	3.54	0.56
SCH / 14	140	62	466	7.35	1.10
SCH / 21	210	62	640	10.98	1.80
SCH / 28	280	62	796	14.52	2.35
SCH / 35	350	62	929	18.44	3.05
SCH / 42	420	62	1057	22.18	3.78
SCH / 49	490	62	1180	25.91	4.30
SCH / 56	560	62	1295	29.72	4.92
SCH / 63	630	62	1410	33.37	5.55
SCH / 70	700	62	1515	37.09	6.18
SCH / 77	770	62	1581	38.84	6.80
SCH / 84	840	62	1615	40.60	7.47

[Outputs: 90/70/20 Δt 60°C EN442]


[Dimensions in millimetres]

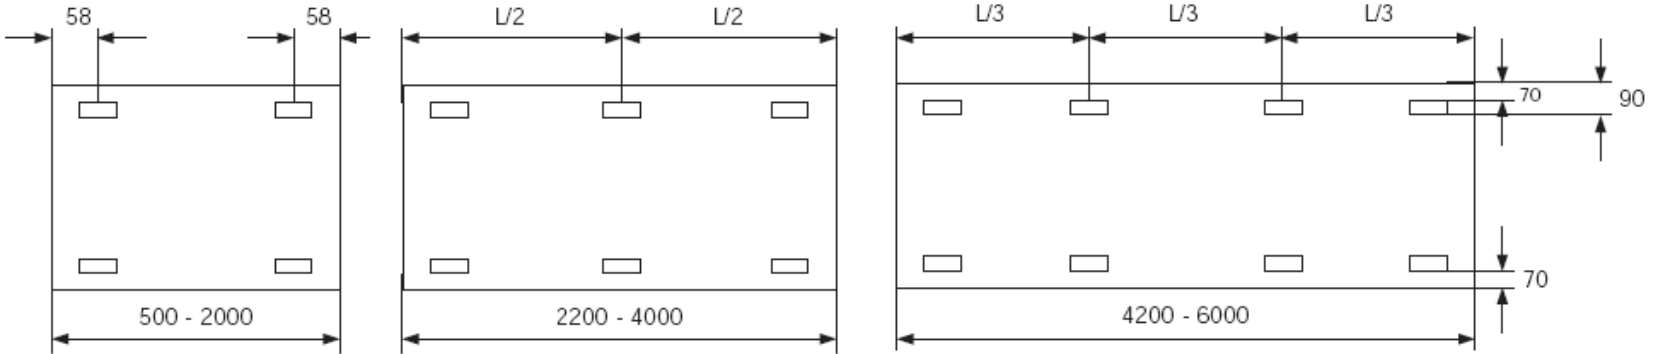

Fixing positions for 280 - 840mm height

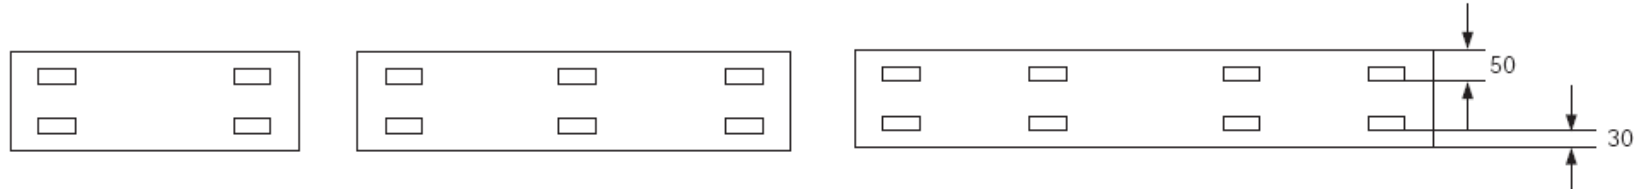

Fixing positions for 140 - 210mm height

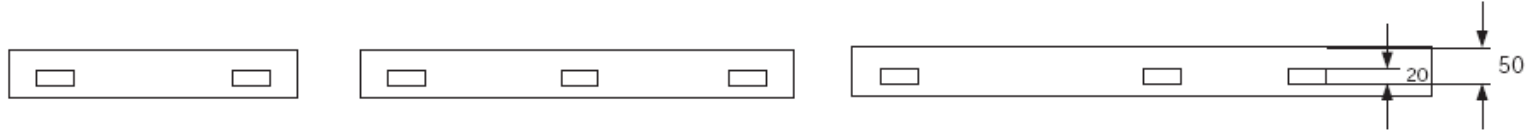

Fixing positions for 70mm height

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
 WWW.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687