




| Model | | 470 | 570 | 670 | 750 | 950 |
|-----------------------------------|---------------------|-------------|-------------|-------------|-------------|-------------|
| Height | H1 With Foot | 470 | 570 | 670 | 750 | 950 |
| | H2 Without Foot | 400 | 500 | 600 | 680 | 880 |
| Centres | C1 Vertical centres | 300 | 400 | 500 | 580 | 780 |
| | C2 Floor to tapping | 110 | 110 | 110 | 110 | 110 |
| | C3 Wall to tapping | 143/ 153 | 143/ 153 | 143/ 153 | 143/ 153 | 143/ 153 |
| Section width | W mm | 79 | 79 | 79 | 78 | 78 |
| Depth | D2 With Foot | 250 | 250 | 250 | 250 | 250 |
| | D1 Without Foot | 222.5 | 222.5 | 222.5 | 222.5 | 222.5 |
| Overall projection | With Foot | 270/ 280 | 270/ 280 | 270/ 280 | 270/ 280 | 270/ 280 |
| | Without Foot | 257/ 267 | 257/ 267 | 257/ 267 | 257/ 267 | 257/ 267 |
| Water Volume per Section | litre | 1.50 | 1.80 | 2.10 | 2.30 | 2.80 |
| Dry Weight per Section* | kg | 9.9 | 10.4 | 10.9 | 11.3 | 14.4 |
| Output @ Δt 50 | Watts | 84 | 97 | 115 | 144 | 182 |
| BS EN442 per sect. | Btu/hr | 285 | 331 | 393 | 490 | 622 |
| Output @ Δt 55.5 | Watts | 95 | 110 | 130 | 163 | 206 |
| BS EN442 per sect. | Btu/hr | 323 | 375 | 445 | 555 | 704 |
| Output @ Δt 60 | Watts | 106 | 123 | 146 | 182 | 231 |
| BS EN442 per sect. | Btu/hr | 362 | 420 | 498 | 621 | 788 |
| Maximum Factory Assembled Lengths | | 30 | 30 | 30 | 15 | 15 |


*add 0.500kg per foot section

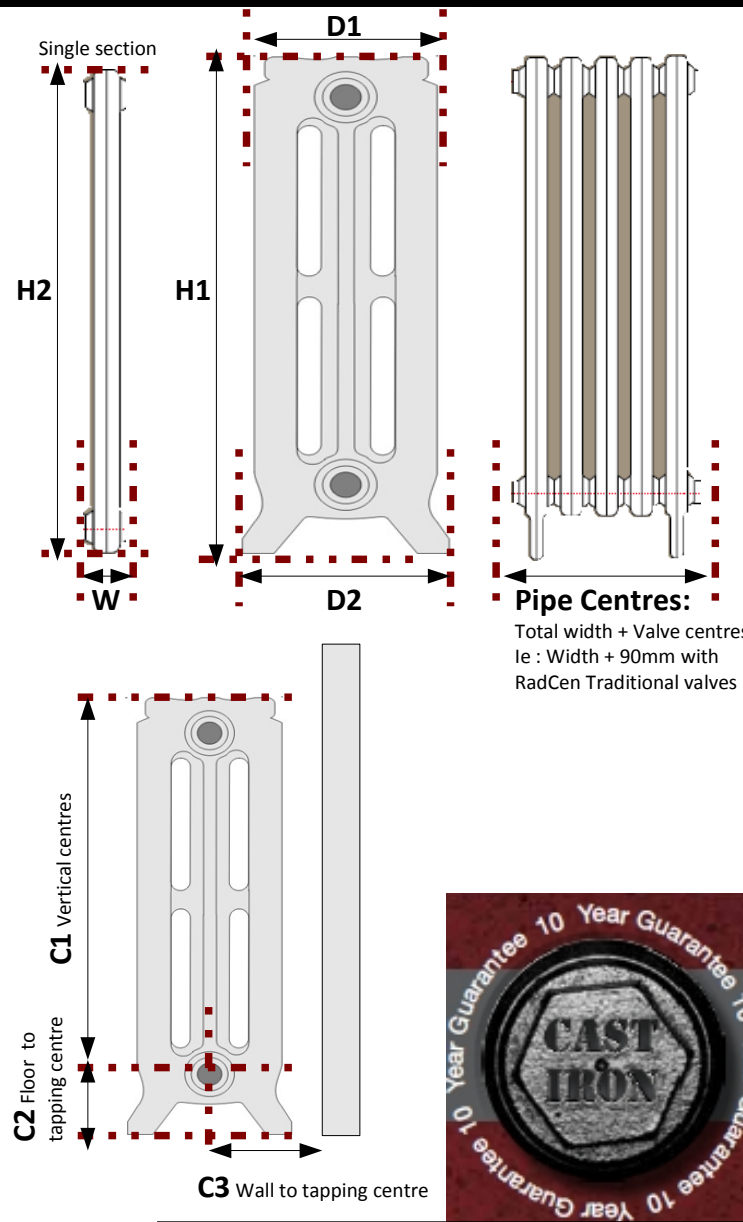

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687




| CODE | Height (mm) | Width (mm) | Depth (mm) | Sections (no) | Power (watts) |
|-----------------|-------------|------------|------------|---------------|---------------|
| 470/3 sections | 470 | 270 | 250 | 3 | 320 |
| 470/4 sections | 470 | 349 | 250 | 4 | 426 |
| 470/5 sections | 470 | 428 | 250 | 5 | 533 |
| 470/6 sections | 470 | 507 | 250 | 6 | 639 |
| 470/7 sections | 470 | 586 | 250 | 7 | 746 |
| 470/8 sections | 470 | 665 | 250 | 8 | 852 |
| 470/9 sections | 470 | 744 | 250 | 9 | 959 |
| 470/10 sections | 470 | 823 | 250 | 10 | 1065 |
| 470/11 sections | 470 | 902 | 250 | 11 | 1172 |
| 470/12 sections | 470 | 981 | 250 | 12 | 1278 |
| 470/13 sections | 470 | 1060 | 250 | 13 | 1385 |
| 470/14 sections | 470 | 1139 | 250 | 14 | 1491 |
| 470/15 sections | 470 | 1218 | 250 | 15 | 1598 |

| CODE | Height (mm) | Width (mm) | Depth (mm) | Sections (no) | Power (watts) |
|-----------------|-------------|------------|------------|---------------|---------------|
| 570/3 sections | 570 | 270 | 250 | 3 | 371 |
| 570/4 sections | 570 | 349 | 250 | 4 | 494 |
| 570/5 sections | 570 | 428 | 250 | 5 | 618 |
| 570/6 sections | 570 | 507 | 250 | 6 | 741 |
| 570/7 sections | 570 | 586 | 250 | 7 | 865 |
| 570/8 sections | 570 | 665 | 250 | 8 | 988 |
| 570/9 sections | 570 | 744 | 250 | 9 | 1112 |
| 570/10 sections | 570 | 823 | 250 | 10 | 1235 |
| 570/11 sections | 570 | 902 | 250 | 11 | 1359 |
| 570/12 sections | 570 | 981 | 250 | 12 | 1482 |
| 570/13 sections | 570 | 1060 | 250 | 13 | 1606 |
| 570/14 sections | 570 | 1139 | 250 | 14 | 1729 |
| 570/15 sections | 570 | 1218 | 250 | 15 | 1853 |

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]

Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687




| CODE | Height (mm) | Width (mm) | Depth (mm) | Sections (no) | Power (watts) |
|-----------------|-------------|------------|------------|---------------|---------------|
| 670/3 sections | 670 | 270 | 250 | 3 | 439 |
| 670/4 sections | 670 | 349 | 250 | 4 | 585 |
| 670/5 sections | 670 | 428 | 250 | 5 | 731 |
| 670/6 sections | 670 | 507 | 250 | 6 | 878 |
| 670/7 sections | 670 | 586 | 250 | 7 | 1024 |
| 670/8 sections | 670 | 665 | 250 | 8 | 1170 |
| 670/9 Sections | 670 | 744 | 250 | 9 | 1316 |
| 670/10 sections | 670 | 823 | 250 | 10 | 1463 |
| 670/11 sections | 670 | 902 | 250 | 11 | 1609 |
| 670/12 sections | 670 | 981 | 250 | 12 | 1755 |
| 670/13 sections | 670 | 1060 | 250 | 13 | 1901 |
| 670/14 sections | 670 | 1139 | 250 | 14 | 2048 |
| 670/15 sections | 670 | 1218 | 250 | 15 | 2194 |

| CODE | Height (mm) | Width (mm) | Depth (mm) | Sections (no) | Power (watts) |
|-----------------|-------------|------------|------------|---------------|---------------|
| 750/3 sections | 750 | 258 | 250 | 3 | 548 |
| 750/4 sections | 750 | 336 | 250 | 4 | 730 |
| 750/5 sections | 750 | 414 | 250 | 5 | 913 |
| 750/6 sections | 750 | 492 | 250 | 6 | 1095 |
| 750/7 sections | 750 | 570 | 250 | 7 | 1278 |
| 750/8 sections | 750 | 648 | 250 | 8 | 1460 |
| 750/9 sections | 750 | 726 | 250 | 9 | 1643 |
| 750/10 sections | 750 | 804 | 250 | 10 | 1825 |
| 750/11 sections | 750 | 882 | 250 | 11 | 2007 |
| 750/12 sections | 750 | 960 | 250 | 12 | 2190 |
| 750/13 sections | 750 | 1038 | 250 | 13 | 2373 |
| 750/14 sections | 750 | 1116 | 250 | 14 | 2555 |
| 750/15 sections | 750 | 1194 | 250 | 15 | 2736 |

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]



Radiator Centre Ltd : 2 Grand Parade, Polegate, East Sussex, BN26 5HG
www.radiatorcentre.com : info@radiatorcentre.com : Tel 01323 486848 : Fax 01323 486687

| CODE | Height (mm) | Width (mm) | Depth (mm) | Sections (no) | Power (watts) |
|---|-------------|------------|------------|---------------|---------------|
| PLEASE NOTE : SPECIAL ORDER : Standard model supplied in Umber Grey Primer RAL 7022: 10 -20 working days Colours: 6-8 weeks | | | | | |
| 950/3 sections | 950 | 258 | 250 | 3 | 694 |
| 950/4 sections | 950 | 336 | 250 | 4 | 925 |
| 950/5 sections | 950 | 414 | 250 | 5 | 1156 |
| 950/6 sections | 950 | 492 | 250 | 6 | 1387 |
| 950/7 sections | 950 | 570 | 250 | 7 | 1618 |
| 950/8 sections | 950 | 648 | 250 | 8 | 1850 |
| 950/9 sections | 950 | 726 | 250 | 9 | 2080 |
| 950/10 sections | 950 | 804 | 250 | 10 | 2312 |
| 950/11 sections | 950 | 882 | 250 | 11 | 2543 |
| 950/12 sections | 950 | 960 | 250 | 12 | 2775 |
| 950/13 sections | 950 | 1038 | 250 | 13 | 3006 |
| 950/14 sections | 950 | 1116 | 250 | 14 | 3247 |
| 950/15 sections | 950 | 1194 | 250 | 15 | 3468 |

[Outputs: 90/70/20 Δt 60°C EN442]

[Dimensions in millimetres]